

## VIRGOLA NO-DROP

### Version

Built-in - 120 cm - 800 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122359571

## FEATURES

Tempered turning glass  
Electronic control  
Metallic grease filter, removable and washable  
Optional charcoal filter  
Optional Chimney  
Dynamic LED Light (2700K - 5600K)  
Scotch brite stainless steel  
No-Drop patented anti-condensation system

## OPTIONAL ACCESSORIES

### KCVJN.01#3

Chimney h 120 mm

### KCVJN.00#3

Telescopic chimney h 185 + h 185

### KACL.954

Cellular charcoal filter

## TECHNICAL FEATURES

### Installation type

Built-in

### Dimensions

120 cm

### Finishing

Scotch brite stainless steel

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 4x1,2 W - 2700 K / 5600 K

### Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

23.00 kg

### Net weight

18.50 kg

### Volume

0.24 m<sup>3</sup>

### Packaging size

Length

1295 mm

Height

465 mm

Depth

395 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage / Frequency

220-240V

50-60Hz

## MOTOR TECHNICAL SHEET

### Maximum capacity

670 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

67 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


500 Pa

### Max. motor power

215 W

### ENERGY CLASS

B

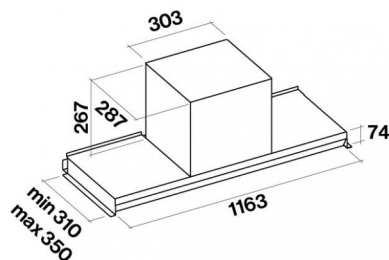

## VIRGOLA NO-DROP

### Version

Built-in - 120 cm - 800 m<sup>3</sup>/h

### Collection

Design+


### EAN code

8034122359571

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591 Normalized Pipes	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

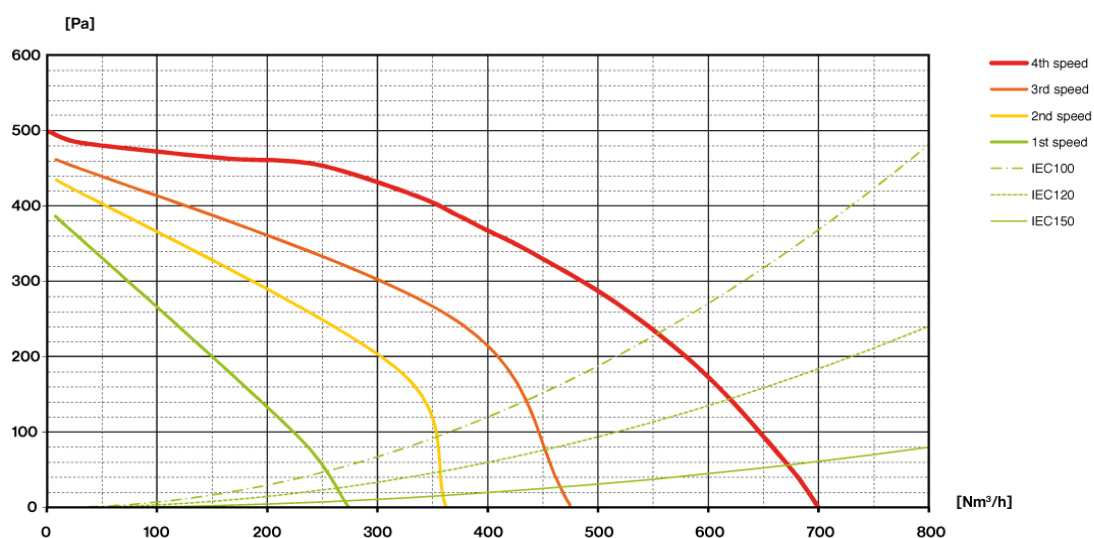

## VIRGOLA NO-DROP

### Version

Built-in - 120 cm - 800 m<sup>3</sup>/h


### Collection

Design+

### EAN code

8034122359571

## ENERGY LABEL

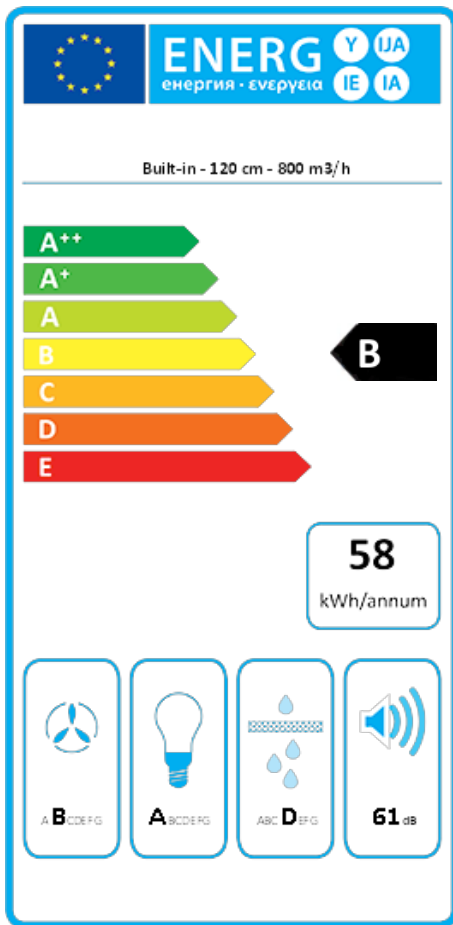

PF		
<b>S</b>	Falmec Spa	
<b>M</b>	Built-in - 120 cm - 800 m <sup>3</sup> /h	
<b>AEC</b>	58,1	kWh/a
<b>ECC</b>	B	
<b>FDE</b>	26,4	
<b>FDEC</b>	B	
<b>LE</b>	31,4	
<b>LEC</b>	A	
<b>GFE</b>	70,0	
<b>GFEC</b>	D	
<b>Qmin</b>	250,0	m <sup>3</sup> /h
<b>Qmax</b>	480,0	m <sup>3</sup> /h
<b>Qboost</b>	620,0	m <sup>3</sup> /h
<b>SPEmin</b>	49	dBa
<b>SPEmax</b>	61	dBa
<b>SPEboost</b>	66	dBa
<b>PO</b>	-	W
<b>PS</b>	0,48	W
PI		
<b>F</b>	1,0	
<b>EEl</b>	59,2	
<b>Qbep</b>	364,0	m <sup>3</sup> /h
<b>Pbep</b>	371	Pa
<b>Qboost</b>	620,0	m <sup>3</sup> /h
<b>Wbep</b>	142,0	W
<b>WL</b>	8,60	W
<b>Emiddle</b>	270	lux
<b>Lwa-SPEmax</b>	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.