

## ELLITTICA

### Version

Island 70 cm - 800 m<sup>3</sup>/h

### Collection

Design+

### EAN code

8034122306841



The photograph is purely for information  
It may not correspond to the selected version.

## FEATURES

**Scotch brite stainless steel (AISI 304) brilliant finishing in the lower frame**  
**Etched tempered extra light glass**  
**Perimeter suction**  
**Electronic control**  
**Neon lighting**  
**Metallic grease filter, removable and washable**  
**Charcoal filter included**

## OPTIONAL ACCESSORIES

### KACL.798#41F

Remote under-roof motor 950 m<sup>3</sup>/h

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h  
Brushless

### KACL.786#41F

Outdoor extractor fan 1000 m<sup>3</sup>/h

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300 m<sup>3</sup>/h

## TECHNICAL FEATURES

### Installation type

Island

### Dimensions

70 cm

### Finishing

Etched tempered extra light glass  
Scotch brite stainless steel (AISI 304) brilliant finishing in the lower frame

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Neon 2x8 W

### Filter

Metallic filter "Air Falmec" - Wall  
278x301 mm - 2 pz

### Charcoal filter

Round charcoal filter Ø170 mm -  
Type 6 - included

### Minimum distance

Gas hob: 63 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

46.00 kg

### Net weight

39.00 kg

### Volume

0.75 m<sup>3</sup>

### Packaging size

Length

1070 mm

Height

870 mm

Depth

810 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

320 W

### Voltage / Frequency

220-240V

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

700 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

65 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


510 Pa

### Max. motor power

224 W

### ENERGY CLASS

B

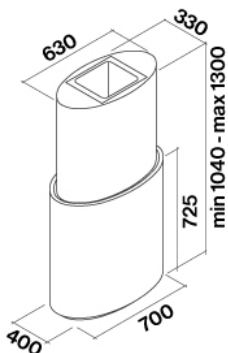

## ELLITTICA

### Version

Island 70 cm - 800 m<sup>3</sup>/h

### Collection

Design+


### EAN code

8034122306841

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	45	52	57	65
Capacity (m <sup>3</sup> /h) I.E.C.61591 Normalized Pipes	270	370	470	700
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

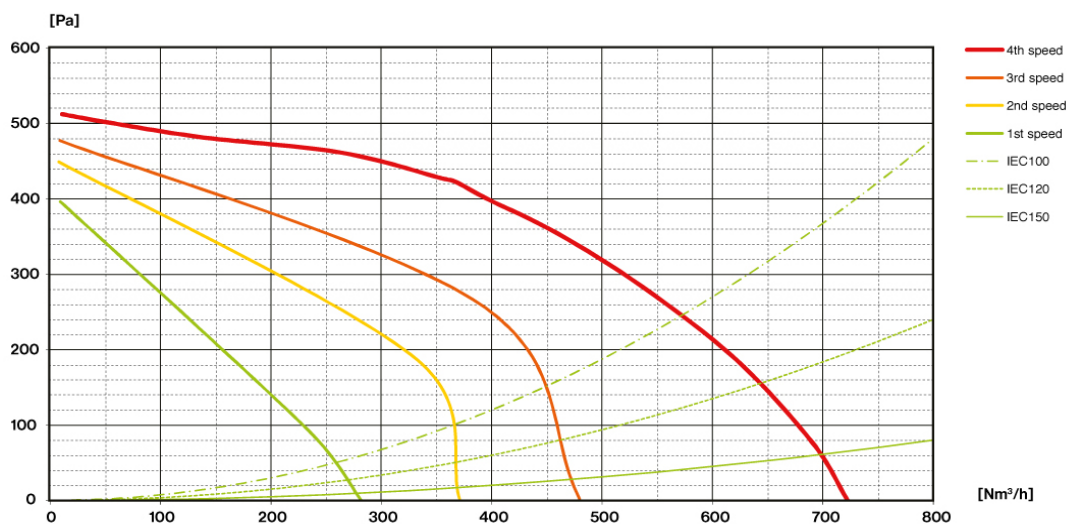

## ELLITTICA

### Version

Island 70 cm - 800 m<sup>3</sup>/h


### Collection

Design+

### EAN code

8034122306841

## ENERGY LABEL

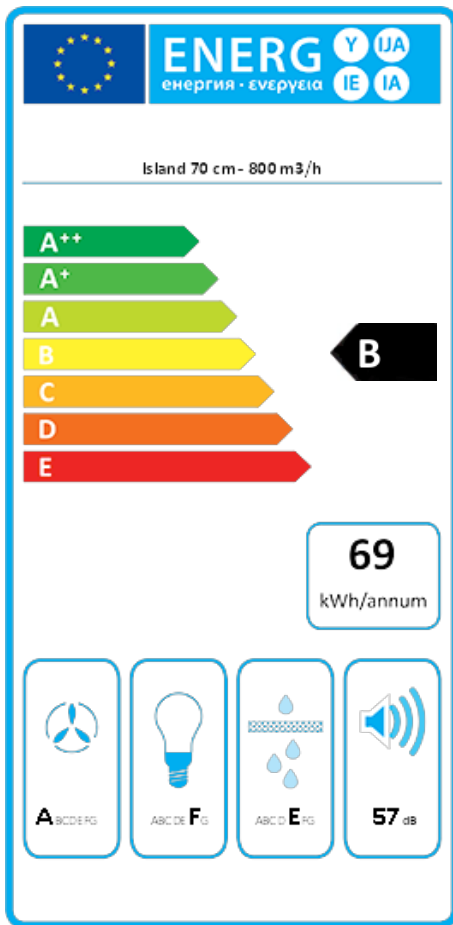

PF		
S	Falmec Spa	
M	Island 70 cm - 800 m <sup>3</sup> /h	
AEC	68,8	kWh/a
ECC	B	
FDE	28,1	
FDEC	A	
LE	5,2	
LEC	F	
GFE	62,0	
GFEC	E	
Qmin	270,0	m <sup>3</sup> /h
Qmax	470,0	m <sup>3</sup> /h
Qboost	700,0	m <sup>3</sup> /h
SPEmin	45	dBa
SPEmax	57	dBa
SPEboost	65	dBa
PO	-	W
PS	0,48	W
PI		
F	1,0	
EEl	63,0	
Qbep	366,0	m <sup>3</sup> /h
Pbep	423	Pa
Qboost	700,0	m <sup>3</sup> /h
Wbep	153,0	W
WL	17,80	W
Emiddle	93	lux
Lwa-SPEmax	57	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.