

GRUPPO INCASSO MURANO

Version

Built-in 50 cm - White - 800 m³/h

Collection

Design

EAN code

8034122348391



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Painted white steel
White glass
Perimeter suction
Touch control + 24 h function
Metallic grease filter, removable and washable
Charcoal filter included
Remote control included
Dynamic LED Light (2700K - 5600K)

OPTIONAL ACCESSORIES

KACL.798#41F
Remote under-roof motor 950 m³/h
KACL.770#41F
Remote under-roof 1100 m³/h
Brushless
KACL.786#41F
Outdoor extractor fan 1000 m³/h
KACL.796#4AF
Outdoor extractor fan 1500 m³/h
KACL.797#4AF
Remote under-roof motor 1300 m³/h

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
50 cm
Finishing
Painted white steel
White glass
Motor
800 m³/h
Type of control
Electronic control
Speed settings
4
Lighting
Led 2x1,2 W - 2700 K / 5600 K
Filter
Metallic filter "Base" - 204x207 mm - 2 pz
Charcoal filter
Round charcoal filter Ø170 mm - Type 6
Minimum distance
Gas hob: 62 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
13.00 kg
Net weight
11.00 kg
Volume
0.08 m³
Packaging size
Length
610 mm
Height
375 mm
Depth
350 mm


CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage / Frequency
220-240V

50-60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
670 m³/h
I.E.C. 61591
Maximum noise level
67 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
500 Pa
Max. motor power
215 W
ENERGY CLASS
B

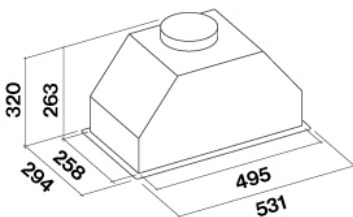

GRUPPO INCASSO MURANO

Version

Built-in 50 cm - White - 800 m³/h

Collection

Design

EAN code

8034122348391

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591 Normalized Pipes	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE



GRUPPO INCASSO MURANO

Version

Built-in 50 cm - White - 800 m³/h


Collection

Design

EAN code

8034122348391

ENERGY LABEL

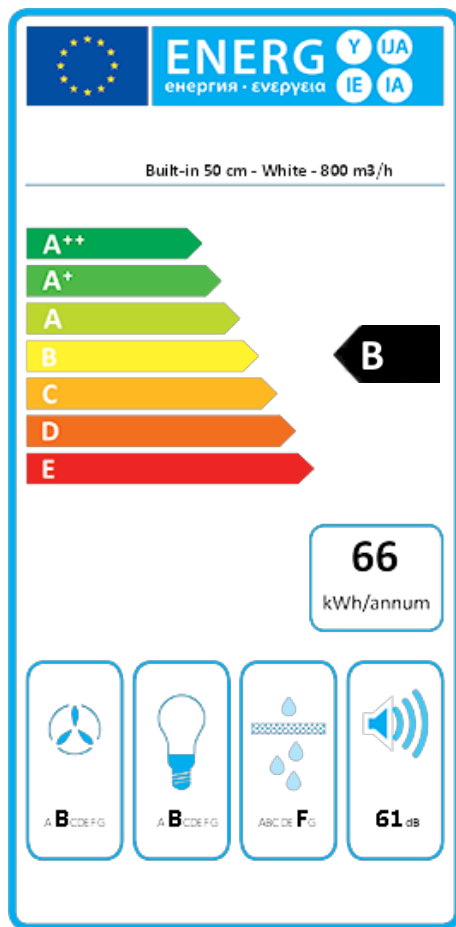

PF		
S	Falmec Spa	
M	Built-in 50 cm - White - 800 m ³ /h	
AEC	65,9	kWh/a
ECC	B	
FDE	25,5	
FDEC	B	
LE	21,6	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m ³ /h
Qmax	470,0	m ³ /h
Qboost	670,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	64,9	
Qbep	333,0	m ³ /h
Pbep	407	Pa
Qboost	670,0	m ³ /h
Wbep	147,7	W
WL	9,00	W
Emiddle	190	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.