

QUANTUM

Version

Quantum - 600 m³/h

Collection

Integrated cooking systems

EAN code

8034122359762



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Residual heat indicators
Keep warm function: maximum temperature 70°
9 cooking levels + Power function (Over Boost)
Pot detector sensor
Timer / minute minder
Safety switch-off / safety lock function
Double Bridge Function
Automatic cut-off timer
Brushless Motor
Touch control with LED display
Carbon.Zeo/Metallic filter maintenance warning
Carbon.Zeo filter maintenance warning
Schott black ceramic glass
Black steel extraction area frame
Auto mode (suction speed automatically adjusts to cooking power)
4 cooking areas with Flex Surface technology

TECHNICAL FEATURES

Installation type
 Worktop
Dimensions
 84 cm
Finishing
 Schott black glass
Motor
 600 m³/h
Type of control
 Touch control
Speed settings
 9




PACKAGING: WEIGHTS AND VOLUMES

Gross weight
 33 kg
Net weight
 28 kg
Volume
 0,24 m³
Packaging size
 Length
 1055 mm
 Height
 610 mm
 Depth
 375 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
 7560 W
Voltage
 220-240V
Frequency
 50-60Hz

ENERGY CLASS
 A+



QUANTUM

Version

Quantum - 600 m³/h


Collection

Integrated cooking systems

EAN code

8034122359762

ENERGY LABEL

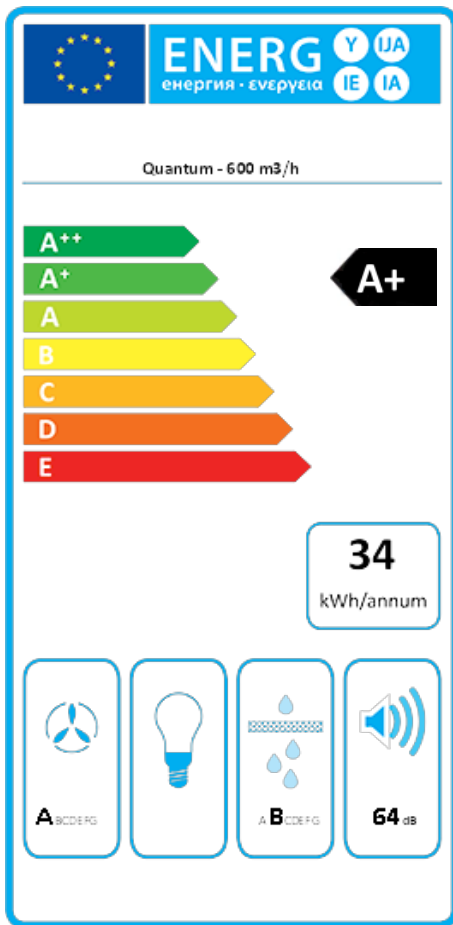

PF		
S	Falmec Spa	
M	Quantum - 600 m ³ /h	
AEC	33,6	kWh/a
ECC	A+	
FDE	32,0	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	170,0	m ³ /h
Qmax	380,0	m ³ /h
Qboost	440,0	m ³ /h
SPEmin	46	dBa
SPEmax	64	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	0,8	
EEl	42,7	
Qbep	252,0	m ³ /h
Pbep	525	Pa
Qboost	440,0	m ³ /h
Wbep	115,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	64	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.